


LAN TO LAN IP BRIDGE

The **IP•Tube E2** is used to interconnect Ethernet LANs through an IP network. Ethernet frames that are destined for a device located on the remote network are encapsulated into IP packets. The IP packets, with the encapsulated Ethernet frames, are sent to the IP address of the destination network's **IP•Tube E2** where the IP envelope is removed and the original Ethernet Frames are delivered to the destination network's Ethernet device.

Transparent Interconnect

The **IP•Tube E2** transparently monitors all the packet traffic on its internal LAN segment to determine whether the packets it receives are to be forwarded. The Ethernet MAC layer source addresses that are active on the internal LAN are stored in a filtering database. Packets with a MAC destination that do not match a MAC address entry for the receiving port are encapsulated in an IP packet that is forwarded to the remote network.

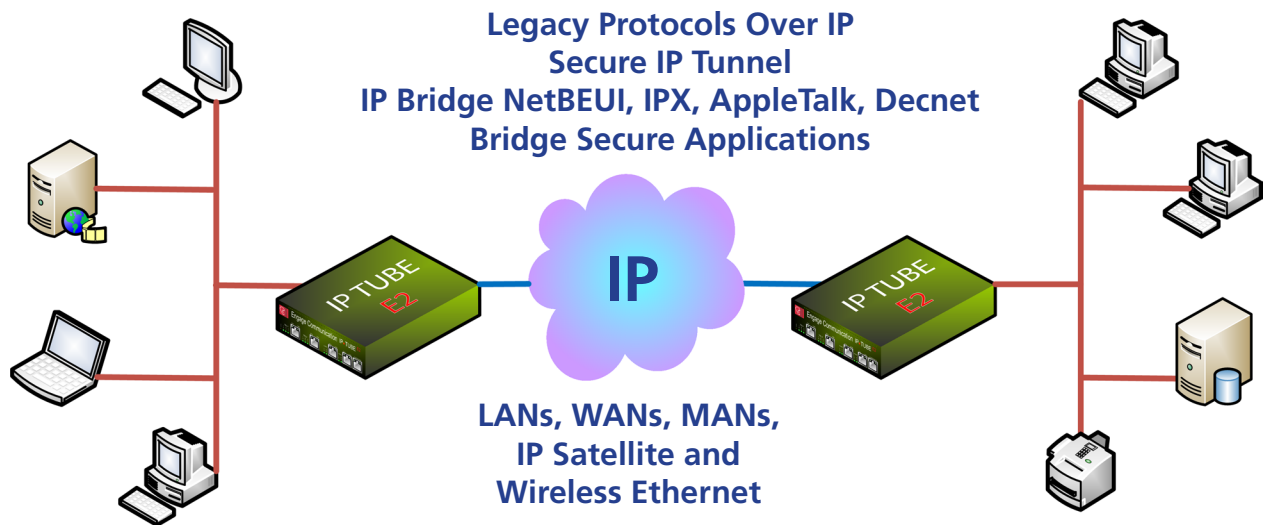

Legacy Protocols Over IP

Enterprises, Education, Government Agencies and Organizations use the **IP•Tube E2** tunnel to transport legacy LAN protocols, such as NetBEUI, IPX, AppleTalk and Decnet, over very cost effective IP only based services. Legacy applications that utilize non routable protocols are able to access services across an IP point to point connection.

Secure Communication

The **IP•Tube E2** provides a high level of security by only exchanging packets with the remote network. Additionally Ethernet Frames within the IP envelope must be addressed to specific Ethernet MAC addresses. Bridge secure applications that limit communication to IP addresses within the same subnet across an enterprise Intranet.

Network Security

Security is established with Full On Source, Destination Address; Port and Flag IP Packet filtering. Interconnectivity is selectively controlled at the interface, network, device and application layers.

Standard Features

Service Quality Packet Prioritizing

The IP•Tube E2 uses the Type of Service byte in the IP packets to prioritize the encapsulated Ethernet frames. The setting of the TOS byte can be used to ensure that real time data from the IP•Tube E2 is ensured high priority. Additionally 802.1p/q VLAN tagging provides layer 2 prioritization.

Management Interface

Management of the IP•Tube E2 is accomplished with a Command Line Interface that is accessed through a Console or Telnet connection. Templates of the most common configuration provide for an Edit and Paste configuration. SNMP MIB I and II support, with traps, is a standard feature.

Technical Specifications

LAN Network Interface:

- Two 10/100BaseT Full/Half Ethernet
- Autonegotiation or Configured Speed/Duplex

LAN Network Protocols Supported:

- IP, TCP, UDP, ICMP

Quality of Service Support:

- IP Type of Service (TOS) CLI configured
- IANA Registered UDP Port 3175
- 802.1p/q VLAN tagging provides layer 2 prioritization

Management:

- Telnet support with Edit and Paste Template Files
- Console Port for Out of Band Management
- SNMP support (MIB I, MIB II) with configured traps
- Remote config., monitoring, & reset

TFTP Online Upgrade Capable

- IPTube is fully operational during upgrade

Regulatory:

- CE • Safety -IEC60950 • EMC - CFR 47 Part 15 Sub Part B:2002, EN55022:1994+A1&A2, EN55024, ICES-003 1997, CISPR 22 Level A

Rear Panel/Power:

- 10-30 VDC, 1.0A.
- Screw Locking Connector
- Universal Adapter 100/240 VAC 50/60 Hz
- Optional -48V 0.25 Amp • Hot Standby
- Dimensions: 9" (L) x 7.3" (W) x 1.50" (H)



How to Order — IP•Tube E2

Part No.	Description	Notes
040-1002	IP•Tube E2	
Power Options		Specify as suffix
-DCMOD	Power Supply Module 12-30 VDC	Ships with Universal Adapter 90/240 50/60
-N48VDC	Power Supply Module Negative 48 Volt DC	Isolated Negative 48 Volt Power
Rack Mount Option		Specify as suffix
-RACKMNT	19/23" Wide Rack Mount Brackets	Enclosure Nut Serts Installed